




## Pilkington PYROSHIELD *Safety Clear*

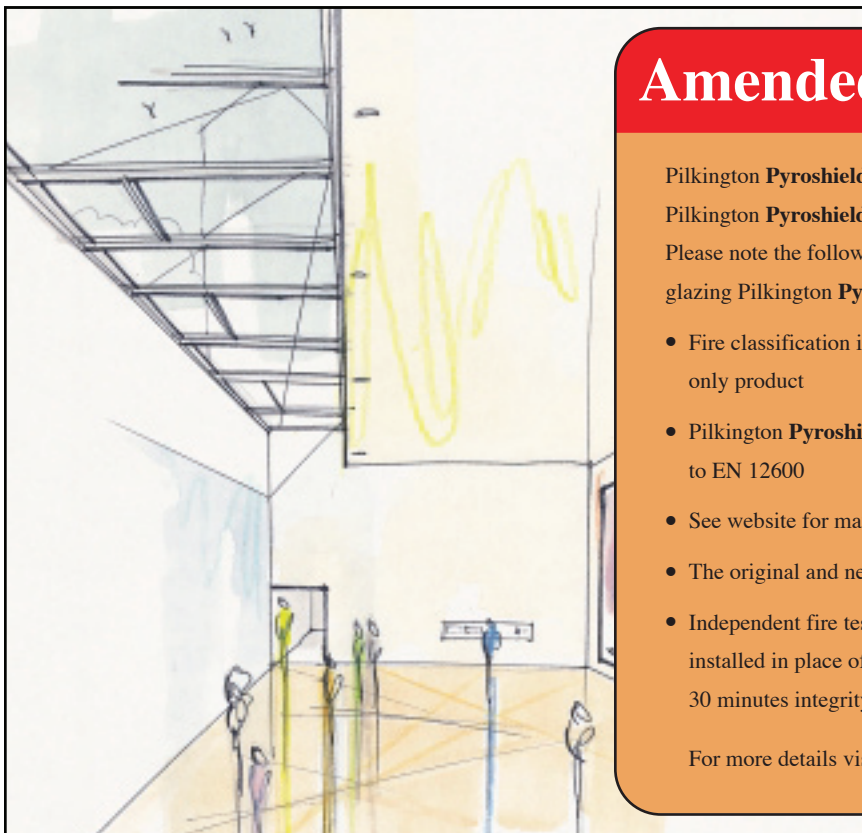

### Amended October 2009

Pilkington **Pyroshield™** has been superseded by Pilkington **Pyroshield™ 2** which has different characteristics. Please note the following important points when specifying or glazing Pilkington **Pyroshield™ 2**;

- Fire classification is only as a 30 minute integrity only product
- Pilkington **Pyroshield™ 2** Texture has no classification to EN 12600
- See website for maximum pane sizes for doors and screens
- The original and new products should not be mixed
- Independent fire test evidence confirms that it can be installed in place of Pilkington **Pyroshield™** to provide 30 minutes integrity only in this glazing assembly

For more details visit [www.pilkington.co.uk/pyroshield2](http://www.pilkington.co.uk/pyroshield2)

#### FIRE TEST SUMMARY

**Horizontal Steel Screen**  
*30 minutes integrity*

Test Reference WARRES 62325



**PILKINGTON**

# Horizontal Steel Screen

## 30 minutes integrity

### Test Reference:

WARRES 62325

### Test Station:

Warrington Fire Research Centre

### Test Date:

20th January 1995

### Test Sponsor:

Pilkington United Kingdom Limited

### Test Standard:

BS 476: Part 20: 1987

### Note:

*In the absence of any recognised test procedure for this type of assembly each specimen was assessed against the performance criteria for integrity and insulation as given in BS 476: Part 20: 1987.*

### General description of the assembly

- 6mm Pilkington PYROSHIELD *Safety* Clear glass
- Single glazing and double glazed with non-fire rated glass
- Horizontal mild steel framework
- Mild steel glazing bars retaining glass
- Galvanised mild steel angles retaining framework
- Glass bedded using ceramic fibre tape
- Intumescent seals incorporated into the construction




Glazing dimensions are actual glass sizes

## Key to figures

- |   |   |
|---|---|
| <p><b>1</b> 6mm Pilkington PYROSHIELD <i>Safety</i> Clear glass</p> <p><b>2</b> Double glazing unit<br/>(6mm clear toughened glass/10mm airspace/6mm Pilkington PYROSHIELD <i>Safety</i> Clear)</p> <p><b>3</b> 100 x 50 x 2.5mm mild steel rolled hollow sections</p> <p><b>4</b> 50 x 50 x 2mm mild steel rolled hollow sections</p> <p><b>5</b> 50 x 35 x 2mm mild steel rolled hollow sections</p> <p><b>6</b> 110 x 60 x 50mm mild steel brackets 6mm thick</p> <p><b>7</b> 100 x 50 x 1.8mm pressed mild steel angles</p> <p><b>8</b> 50 x 50 x 1.8mm mild steel angles</p> | <p><b>9</b> DUFAYLITE DEVELOPMENTS LTD.<br/>type C linear seal</p> <p><b>10</b> Mineral fibre gasket</p> <p><b>11</b> Mild steel perimeter packers</p> <p><b>12</b> 25 x 12mm CAPE BOARDS LTD.<br/>Supalux board packers</p> <p><b>13</b> CARBORUNDUM RESISTANT MATERIALS LTD.<br/>Fibrefrax ceramic tape</p> <p><b>14</b> 50 x 3mm mild steel glazing bars</p> |
|---|---|

For reasons of confidentiality some of the section sizes and fixing details have been omitted. Please contact the frame manufacturer for further information.

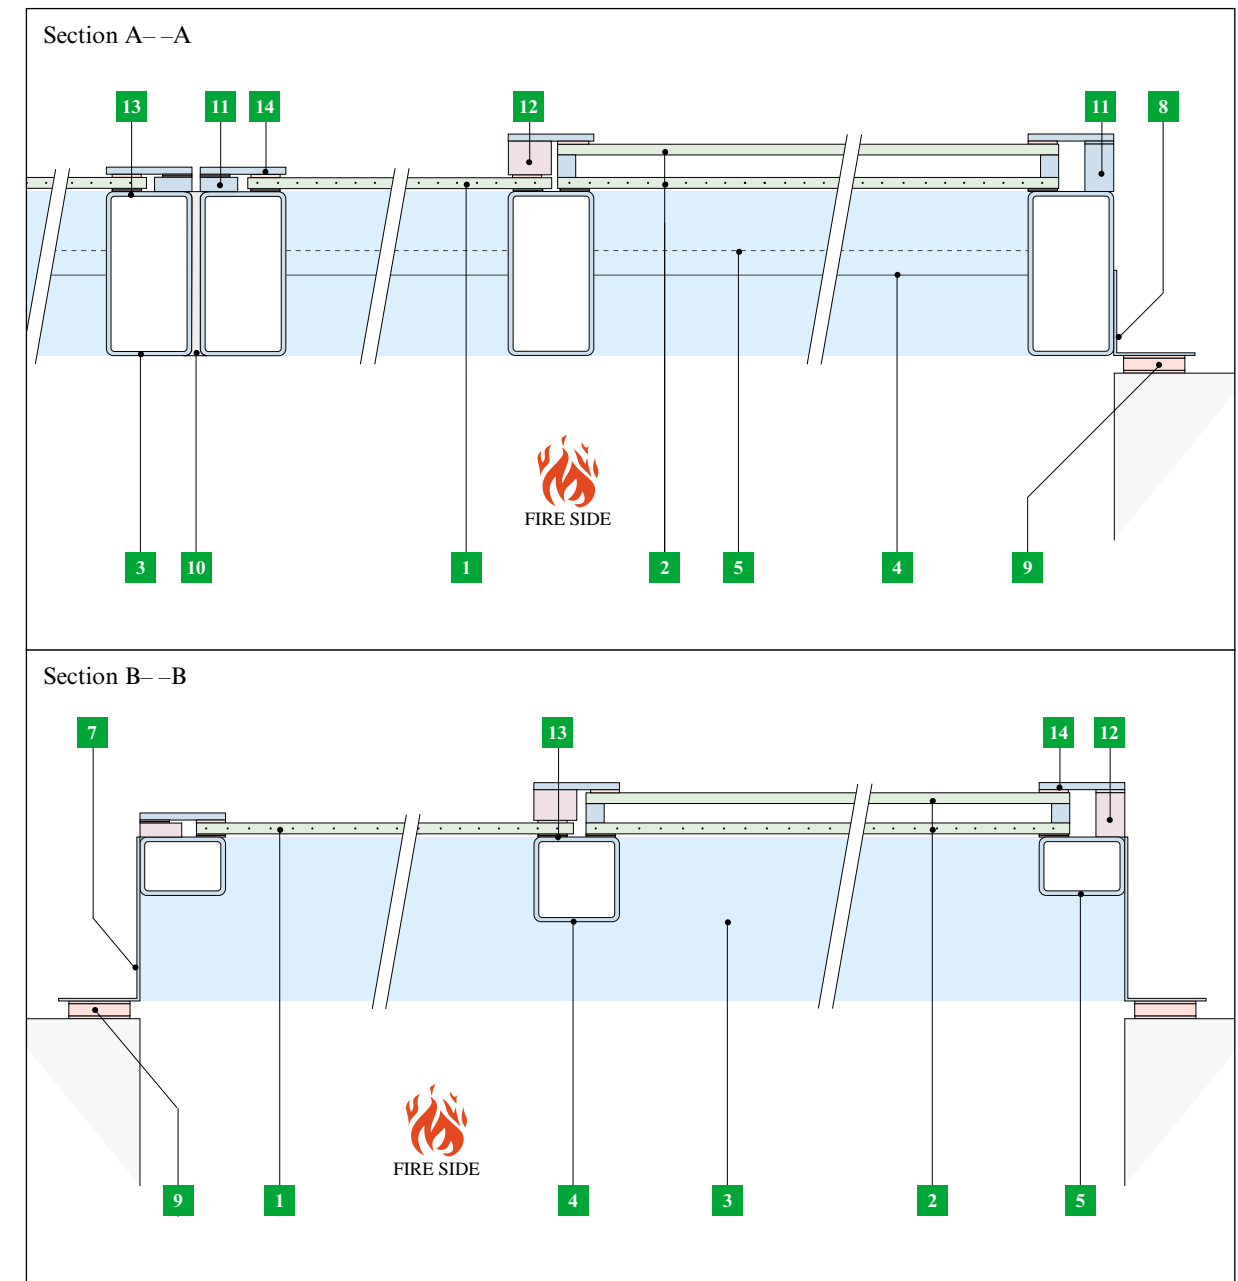

# Scope

The results of this test only relate to the behaviour of the specimen of the element of construction under the particular conditions of the test. They are not intended to be the sole criteria for assessing the potential fire performance of the element in use nor do they reflect the actual behaviour in fires.

*Pilkington PYROSHIELD Safety is classified as a Class C safety glass according to the impact performance requirements of BS 6206:1981, and has been tested extensively in accordance with the fire test requirements of BS 476: Part 22: 1987.*

*This publication gives a general description of the product and materials. It is the responsibility of the user of this document to ensure that their use is appropriate for any particular application and that such application complies with all relevant local and national legislation, standards, codes of practice and other requirements.*

*Pilkington United Kingdom Limited hereby disclaim all liability howsoever arising from any error in or omission from this publication and for all consequences of relying on it.*

*Pilkington product names shown in block capitals are trademarks of the Pilkington Group.*



**PILKINGTON**

**Pilkington United Kingdom Limited**  
Prescot Road St Helens England WA10 3TT  
Telephone 01744 692000 Fax 01744 613049